


FOR IMMEDIATE RELEASE
Thursday, July 24, 2025



Road Commission of Kalamazoo County
Weekly Project Updates

HAVE YOU SIGNED UP?

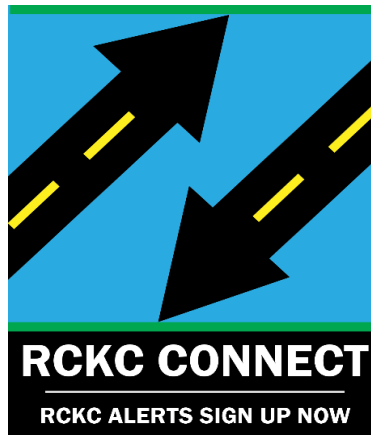

Sign up for RCKC CONNECT to receive message alerts for road construction, road closures/detours, and general public news from the Road Commission of Kalamazoo County website at: www.kalamazoocountyroads.com

Kalamazoo, MI-

In an effort to keep local drivers informed of the latest traffic and road maintenance operations by the Road Commission, we have provided the following update. For further information call 269-381-3170 or visit RCKC website www.kalamazoocountyroads.com.

"This information is made available to assist motorists in planning for construction delays," Travis Bartholomew, Managing Director of the Road Commission said. "Motorists are reminded to **be alert, slow down, stay informed, and be cautious when approaching a the work zone** . Remember, these projects signify progress in improving our infrastructure!"

Please note: This information is subject to change. Projects, road closures and timing can change from day to day, depending upon a number of factors, and traffic delays can develop in a matter of minutes due to weather conditions, emergency situations, etc.

Alamo Township

Road: E Avenue – 1,270' east of Ravine Road to 2,850' east of Ravine Road
Current Status: Week of 7/28 Fine grading and drainage improvements
Detour: None
Project Information: Pulverize, Double Chip Seal
Start Date: April 21, 2025
End Date: October 15, 2025

Road: 8th Street - G Avenue to Hart Drive
Current Status: Drainage improvements and Culvert installation upcoming
Detour: Road Closed to Thru Traffic
Project Information: Gravel Pulverize, HMA Overlay, Drainage Improvements
Start Date: April 21, 2025
End Date: October 15, 2025

Brady Township

Road: YZ Avenue over Brown Creek
Current Status: Bridge deck work continues the week of July 28.
Detour: YZ Avenue will be closed to through traffic and detoured using 32nd Street, X Avenue, 31st Street, W Avenue, and 24th Street, Y Avenue, and 27th Street
Project Information: Preventative maintenance work on this bridge including railing , guardrail, paving, and structural repairs.
Start Date: June 2, 2025
End Date: August 30, 2025

Charleston Township

Road: 38th Street - 4,672' south of G Avenue to 528' south of G Avenue
Current Status: week of 7/28 shoulder gravel and roadside restoration
Detour: Road Closed to Thru Traffic
Project Information: Gravel, Pulverize, HMA Base Paving
Start Date: April 14, 2025
End Date: October 15, 2025

Climax Township

Road: 39th Street – ON Avenue to 3,168' north of ON Avenue, ON Avenue – 39th Street to 3,764' west of 42nd Street (CONTINGENCY PROJECT)
Current Status: Drainage improvements upcoming
Detour: None
Project Information: Gravel Resurface, and drainage improvements
Start Date: June 23, 2025
End Date: October 15, 2025

Comstock Township

Road: Stegar Avenue – Leigh Avenue to Fordham Avenue, Leigh Avenue – East Main Street to Fordham Avenue, Fordham Avenue – 260' west of Stegar Avenue to 699' east of Leigh Avenue
Current Status: Drainage improvements upcoming
Detour: None
Project Information: Milling and Paving new HMA base and surface, drainage improvements, tree removal
Start Date: June 23, 2025
End Date: October 15, 2025

Pavilion Township

Road: 28th Street – QR Avenue to PQ Avenue - Railroad Crossing
Current Status: Week of 7/21 Milling and Paving
Detour: None
Project Information: This project include milling and paving the railroad approaches
Start Date: July 24, 2025
End Date: July 25, 2025

Road: O Avenue – 25th Street to 26th Street - Railroad Crossing
Current Status: Week of 7/21 Milling and Paving
Detour: None
Project Information: This project include milling and paving the railroad approaches
Start Date: July 24, 2025
End Date: July 25, 2025

Road: 26th Street – P Avenue to O Avenue - Railroad Crossing
Current Status: Week of 7/21 Milling and Paving
Detour: None
Project Information: This project include milling and paving the railroad approaches
Start Date: July 24, 2025
End Date: July 25, 2025

Road: T Avenue – 3,500' east of 34th Street to 4,500' east of 34th Street
Current Status: Wedging complete, gravel shoulders to follow
Detour: None
Project Information: HMA wedging
Start Date: April 24, 2025
End Date: October 15, 2025

Road: Q Avenue - 29th Street to 34th Street
Current Status: Driveway removals, pulverizing, and ditching week of 7/28.
Detour: Q Avenue will be closed to through traffic during the project. The detour route is 29th Street, S Avenue, and 36th Street.
Project Information: This project includes tree clearing, crushing the existing asphalt to gravel sized pieces and mixed with the existing gravel, widening of shoulder, paving, and drainage improvements including some ditching.
Start Date: March 17, 2025
End Date: August 4, 2025

Prairie Ronde Township

Road: Y Avenue – 3rd Street to 4th Street; 4th Street – YZ Avenue to Y Avenue; YZ Avenue – 4th Street to 5th Street; 5th Street – YZ Avenue to YZ Avenue, YZ Avenue – 5th Street to 6th Street
Current Status: Culvert installations, and drainage improvements upcoming
Detour: None
Project Information: Tree removal, drainage improvements, culvert replacements and 4" of new gravel.
Start Date: June 23, 2025
End Date: October 15, 2025

Richland Township

Road: G Avenue - 28th Street to 38th Street (Richland / Ross Townships)
Current Status: Paving and restoration anticipated the week of July 28.
Detour: G Avenue will be closed to through traffic at 28th Street. The detour route is 32nd Street and Gull Road. 28th Street will also be closed to through traffic. The detour route is Gull Road, Sprinkle Road, and H Avenue.
Project Information: Center left turn lane construction at 5 intersections along G Avenue at 28th Street, 31st Street, 32nd Street, 35th Street, and 38th Street. Project includes road widening for turn lanes, paving, and drainage improvements including some ditching.
Start Date: April 11, 2025
End Date: August 31, 2025

Ross Township

Road: 38th Street – 528' south of G Avenue to G Avenue
Current Status: Week of 7/28 shoulder gravel and roadside restoration
Detour: None
Project Information: Gravel, pulverize, HMA Base and Surface Paving
Start Date: April 14, 2025
End Date: October 15, 2025

Schoolcraft Township

Road: U Avenue / 23rd Street - 22nd Street to 375' south of TU Avenue
Current Status: Paving, driveway adjustments, foreslope correction, ditching, and restoration week of 7/28.
Detour: U Avenue will be closed to through traffic from 22nd Street to 23rd Street. 23rd Street will also be closed to through traffic from U Ave to TU Ave. The detour route is Sprinkle Road, V Avenue, N Richardson Street, E Prairie Street, S Main Street, W Avenue, and Portage Road.
Project Information: This project includes crushing the existing asphalt to gravel sized pieces and mixing with the existing gravel, widening of shoulder, paving, and drainage improvements with some ditching.
Start Date: May 28, 2025
End Date: August 15, 2025

Texas Township

Road: Torrey Pines Drive – Cypress Bay Drive to Veronica Street, Stapleton Drive – Torrey Pines Drive to 12th Street, Stoneybrook Road – Burning Tree Road (west) to 12th Street, Hunters Ridge Drive – Heathrow Avenue to Cypress Bay Drive, Snowbird Court – Hunters Ridge Drive to Hunters Ridge Drive; Telluride Drive - 1,088' west of Hunters Ridge Drive to Hunters Ridge Drive

Current Status: fog seal construction joint

Detour: None

Project Information: Milling and paving new HMA surface

Start Date: May 12, 2025

End Date: October 15, 2025

Road: Veronica Street – Cypress Bay Drive to Queen Victoria Lane, Lewsinda Avenue (west) – 213' west of Marsha Street to Veronica Street; Marsha Street – Lewsinda Avenue to 135' north of Lewsinda Avenue, Lewsinda Avenue (east) – Veronica Street to 12th Street, Anthony Street – Lewsinda Avenue to 121' north of Lewsinda Avenue

Current Status: fog seal construction joint

Detour: None

Project Information: Milling and paving new HMA surface

Start Date: May 15, 2025

End Date: October 15, 2025

Road: Vankal Street – RS Avenue to Q Avenue

Current Status: week of 7/28 tree removal and drainage improvements upcoming

Detour: none

Project Information: HMA Overlay

Start Date: June 30, 2025

End Date: October 15, 2025

County Wide Projects

Road: Crack Filling on various roads in Kalamazoo County

Current Status: Various Locations

Detour: None

Project Information: Traffic to be maintained during project. This is a mobile operation, temporary traffic regulators may be necessary and slight delays are possible.

Start Date: May 12, 2025

End Date: October 15, 2025

###



2025 Chip Seal Surface Treatment Route

CHIP SEAL is a surface treatment in which asphalt emulsion is applied to a pavement and then immediately covered with a single layer of aggregate. Chip seal is used to seal the surface of an existing pavement and improve surface friction. Rollers, street sweeping and traffic flow after a chip seal assists in compacting the aggregate. RCKC continues to monitor the quality of our product and the application rates for both the asphalt emulsion and the aggregate to reduce stone loss. Chip seal treatments remain the most cost-effective preventative maintenance treatment to preserve our infrastructure. **It is common to have some stone loss, aggregate in lawns and tracking after the application is completed and potentially the following year.**

FOG SEAL is a surface treatment in which asphalt emulsion is applied over the chip seal application, typically 1 - 2 weeks following the chip seal application. The fog seal assists in preventing initial deterioration of the surface, reduce crack filling in the future and extend the timeline for future chip seal applications. Not all chip seal surface treatments also include a fog seal application. **Fog seal will cause some user delays based on cure time and weather impacts.**

Anticipated start date is June 2, weather permitting. The RCKC advanced our chip seal program to a higher level by applying the first chip/fog seal treatment at the beginning stages of the HMA surface life (1-2 years after a new HMA surface is placed) for our primary network. Performing earlier applications of chip seal will protect and preserve the new HMA surface and prevent the initial deterioration of an HMA surface, which will also extend the timeline for future chip seal applications. Chip seal treatments performed at years 1-2 of age will also reduce the crack fill and HMA wedging costs due to improved surface condition and advanced preventive maintenance. **Typically chip seal operations will not be conducted if there is a chance of rain. Chip seal is a moving operation and therefore specific dates for each area/road will be provided on RCKC Connect and on our Facebook page. Traffic delays should be minimal. For a more information on chip seal, including a video please visit:**
https://www.kalamazocountyroads.com/chip_seal.php

**PLEASE DRIVE SLOWLY
SAFER DRIVING, SAFER WORK ZONES FOR EVERYONE**

<u>ROAD/PLAT DEVELOPMENT</u>	<u>SEGMENT</u>	<u>TOWNSHIP</u>	<u>TREATMENT</u>	<u>STATUS</u>
Old Cork Street	Midlink Drive to Park Circle Drive	Comstock	Crack Fill, Chip Seal, Fog Seal	Complete
Interstate Parkway	Old Cork Street to 800' north of Old Cork Street	Comstock	Crack Fill, Chip Seal, Fog Seal	Complete
L Avenue	River Street to 160' east of Stalwart Street	Comstock	Crack Fill, HMA Wedging, Chip Seal, Fog Seal	Complete
Stalwart Street	L Avenue to Market Street	Comstock	Crack Fill, Chip Seal, Fog Seal	Complete
Market Street	River Street to Stalwart Street	Comstock	Crack Fill, HMA Wedging, Chip Seal, Fog Seal	Complete
Comstock Avenue Abbey Street Francis Street Wright Street Celery Street Moline Street Conrad Street Metzger Street Henry Street Gateway Street	River Street to Conrad Street River Street to Metzger Street River Street to Henry Street Moline Street to Gateway Street River Street to Roe Street Celery Street to Comstock Avenue Celery Street to Comstock Avenue Celery Street to Abbey Street Celery Street to Francis Street Celery Street to Wright Street	Comstock	Crack Fill, Chip Seal, Fog Seal	Complete
Winterburn Street Ocom Street Blalock Street Gleason Street	850' south of M-96 to M-96 Gleason Street to M-96 Gleason Street to M-96 Ocom Street to 572' east of Blalock Street	Comstock	Crack Fill, Chip Seal, Fog Seal	Complete
K Avenue	M96 to 33rd Street	Comstock	Crack Fill, HMA Wedging, Chip Seal, Fog Seal	Complete
H Avenue	26th Street to 28th Street	Comstock	Crack Fill, HMA Wedging, Chip Seal, Fog Seal	Complete
28th Street	H Avenue to G Avenue	Comstock	Crack Fill, Chip Seal, Fog Seal	Complete
Country Meadows Drive Duncan Avenue Ringling Avenue Wild Meadow Street Prairie Hill Street Flower Field Avenue Natalie Street Cindy Street Cade Avenue Little Red Avenue Silverton Avenue Durango Street	28th Street to 200' north of Silverton Ave, Country Meadows Drive to 28th Street, Country Meadows Drive to 28th Street, Ringling Avenue to Kristin Avenue, Ringling Ave to Duncan Avenue, Country Meadows Drive to Prairie Hill Street, Wild Meadow Street to Cindy Street, Natalie Street to Kristin Avenue, Cindy Street to 28th Street, 172' west of Wild Meadow Street to Wild Meadow Street, 165' west of Durango Street to Country Meadows Drive, Crestwood Avenue to Silverton Avenue	Comstock	Crack Fill, Chip Seal, Fog Seal	Complete
CD Avenue	46th Street to 48th Street	Ross	Chip Seal, Fog Seal	Complete
46th Street	M89 to C Avenue	Ross	Chip Seal, Fog Seal	Complete
B Avenue	40th Street to 42nd Street	Ross	Chip Seal, Fog Seal	Complete
38th Street	Gull Lake Drive East to C Avenue	Ross	Chip Seal, Fog Seal	Complete
Greer Drive	35th Street to 4,600' east of 35th Street	Richland	Chip Seal, Fog Seal	Complete
34th Street	DE Avenue to D Avenue	Richland	Crack Fill, Chip Seal, Fog Seal	Complete
31st Street	G Avenue to EF Avenue	Richland	Crack Fill, Chip Seal, Fog Seal	Complete
30th Street	D Avenue to M-343	Richland	Crack Fill, Chip Seal, Fog Seal	Complete
28th Street	M-89 to AB Avenue	Richland	Chip Seal, Fog Seal	Complete
C Avenue	24th Street to 27th Street	Richland	Crack Fill, Chip Seal, Fog Seal	Complete
DE Avenue	1,320' west of Sprinkle Road to Sprinkle Road	Richland	Crack Fill, Chip Seal, Fog Seal	Complete
E Avenue	Sprinkle Road to 28th Street	Richland	Crack Fill, Chip Seal, Fog Seal	Complete
FG Avenue	24th Street to Sprinkle Road	Richland	Chip Seal, Fog Seal	Complete

ROAD/PLAT DEVELOPMENT	SEGMENT	TOWNSHIP	TREATMENT	STATUS
McKinley Street	20th Street to Riverview Drive	Cooper	Crack Fill, HMA Wedging, Chip Seal, Fog Seal	Complete
22nd Street	B Avenue to Baseline Road	Cooper	Crack Fill, Chip Seal, Fog Seal	Complete
B Avenue	12th Street to Douglas Avenue	Cooper	Crack Fill, HMA Wedging, Chip Seal, Fog Seal	Complete
B Avenue	Douglas Avenue to 16th Street	Cooper	Crack Fill, HMA Wedging, Chip Seal, Fog Seal	Complete
B Avenue	16th Street to 17th Street	Cooper	Crack Fill, HMA Wedging, Chip Seal, Fog Seal	Complete
Baseline Road	Douglas Avenue to 16th Street	Cooper	Crack Fill, Chip Seal, Fog Seal	
Stoney Woods Drive	Ravine Road to 2,300' east of Ravine Road	Alamo	Crack Fill, Chip Seal, Fog Seal	Complete
E Avenue	1,270' east of Ravine Road to 2,850' east of Ravine Road	Alamo	Pulverize, Double Chip Seal, Fog Seal	
G Avenue	Wolf Lake Drive to 2nd Street	Alamo	Crack Fill, Chip Seal, Fog Seal	Complete
Wolf Drive	Van Kal Street to G Avenue	Oshtemo	Crack Fill, HMA Wedging, Chip Seal, Fog Seal	Complete
H Avenue	Van Kal Street to 3rd Street	Oshtemo	Crack Fill, Chip Seal, Fog Seal	Complete
Lisa Drive Rosemary Lane Josiane Drive	Rosemary Lane to 200' north of Rosemary Lane 503' west of Josiane Drive to 2nd Street 1,170' south of Rosemary Lane to Rosemary Lane	Oshtemo	Crack Fill, Chip Seal, Fog Seal	Complete
Chadds Ford Way	985' south of W Main Street to W Main Street	Oshtemo	Crack Fill, Chip Seal, Fog Seal	Complete
Cross Country Drive Steeplechase Court Windcrest Court West Foxmoor Court East Foxmoor Court Farmwood Court Arbor Valley Drive Hawthorn Valley Drive Oak Highlands Drive	7th Street to 433' north of Oak Highlands Drive, Cross Country Drive to 700' east of Cross Country Drive, Cross Country Drive to 282' east of Cross Country Drive, Cross Country Drive to 364' west of Cross Country Drive, Cross Country Drive to 366' east of Cross Country Drive, Cross Country Drive to 193' west of Cross Country Drive, Cross Country Drive to 646' east of Cross Country Drive, 164' west of Cross Country Drive to 336' east of Cross Country Drive, 380' west of Cross Country Drive to 9th Street	Oshtemo	Crack Fill, Chip Seal, Fog Seal	Complete
7th Street	W Main Street to 5,280' north of W Main Street	Oshtemo	Crack Fill, Chip Seal, Fog Seal	Complete
KL Avenue	2nd Street to 4th Street	Oshtemo	Crack Fill, Chip Seal, Fog Seal	Complete
2nd Street	L Avenue to KL Avenue	Oshtemo	Chip Seal, Fog Seal	Complete
Darlington Trail Tillingsdale Drive Ellington Drive Oshtemo Ridge Trail	Tillingsdale Drive to Oshtemo Ridge Trail, Coddington Lane to Ellington Drive Coddington Lane to Oshtemo Ridge Trail Coddington Lane to Darlington Trail,	Oshtemo	Crack Fill, Chip Seal, Fog Seal	Complete
ML Avenue	4th Street to 8th Street	Oshtemo	Crack Fill, Chip Seal, Fog Seal	Complete
Plainview Street	960' south of Stadium Drive to Stadium Drive	Oshtemo	Crack Fill, Chip Seal, Fog Seal	Complete
Vienna Street	Parkview Avenue to 790' north of Parkview Avenue	Oshtemo	Crack Fill, Chip Seal, Fog Seal	Complete
Baton Rouge Street Charles Street Cajun Drive Belle Chase Boulevard Bayou Vista Street	Belle Chase Boulevard to 8th Street, 600' west of Belle Chase Boulevard to 8th Street, 175' west of Belle Chase Boulevard to Belle Chase Boulevard 206' south of Saint Charles Street to Baton Rouge Street Saint Charles Street to Baton Rouge Street	Oshtemo	Chip Seal, Fog Seal	Awaiting Fog Seal
Stadium Drive	6th Street to 8th Street	Oshtemo	Crack Fill, Chip Seal	Complete
12th Street	ON Avenue to Parkview Avenue	Oshtemo	Crack Fill, Chip Seal	Complete
Valley Industrial Drive	9th Street to 630' east of 9th Street	Oshtemo	Crack Fill, Chip Seal, Fog Seal	Awaiting Fog Seal
1st Street	422' north of Stadium Drive to M Avenue	Oshtemo	Crack Fill, Chip Seal, Fog Seal	Awaiting Fog Seal
Glenwynd Drive	6th Street to O Avenue	Texas	Crack Fill, Chip Seal, Fog Seal	Awaiting Fog Seal
DNR Street	1,050' South of OP Avenue to OP Avenue	Texas	Crack Fill, Chip Seal, Fog Seal	Awaiting Fog Seal
7th Street Crooked Lake Drive East East Crooked Lake Drive	Q Avenue to East Crooked Lake Drive, 800' west of 7th Street to 7th Street, 7th Street to 2,573' north of 7th Street	Texas	Crack Fill, Chip Seal, Fog Seal	Awaiting Fog Seal
6th Street (South Crooked Lake Drive)	Q Avenue to 742' North of Q Avenue	Texas	Crack Fill, HMA Wedging, Chip Seal, Fog Seal	Awaiting Fog Seal
10th Street	R Avenue to Q Avenue	Texas	Crack Fill, Chip Seal, Fog Seal	Awaiting Fog Seal
10th Street	Q Avenue to Texas Drive	Texas	Crack Fill, Chip Seal, Fog Seal	Awaiting Fog Seal
PQ Avenue	7,920' west of 3rd Street to 3rd Street	Texas	Crack Fill, HMA Wedging, Chip Seal, Fog Seal	Awaiting Fog Seal
Chadeau Avenue Norcross Street Keith Court Omega Street	Norcross Street to 10th Street, 308' south of Kieth Court to 400' North of Keith Court, Norcross Street to 400' east of Norcross Street, Chadeau Avenue to 169' north of Chadeau Avenue	Texas	Crack Fill, Chip Seal, Fog Seal	
Vineyard Parkway	720' south of Q Avenue to Q Avenue	Texas	Crack Fill, Chip Seal, Fog Seal	

ROAD/PLAT DEVELOPMENT	SEGMENT	TOWNSHIP	TREATMENT	STATUS
Treasure Island Drive Pepper Avenue Woods Drive Finnagen Street	Pepper Avenue to 2,544' north of Pepper Avenue, Treasure Island Drive to 667' east of Finnagen Street, Treasure Island Drive to 934' north of Treasure Island Drive, PQ Avenue to Pepper Avenue	Texas	Crack Fill, Chip Seal, Fog Seal	Awaiting Fog Seal
2nd Street	S Avenue to RS Avenue	Texas	Crack Fill, HMA Wedging, Chip Seal, Fog Seal	Awaiting Fog Seal
RS Avenue	2nd Street to 6th Street	Texas	Crack Fill, Chip Seal, Fog Seal	Awaiting Fog Seal
4th Street	XY Avenue to W Avenue- No Fog	Prairie Ronde	Crack Fill, Chip Seal	
VW Avenue	8th Street to 12th Street- No Fog	Prairie Ronde	Crack Fill, Chip Seal	Complete
16th Street	Z Avenue to VW Avenue	Schoolcraft	Crack Fill, HMA Wedging, Chip Seal, Fog Seal	Upcoming
YZ Avenue	2,640' west of US 131 to US 131	Schoolcraft	Crack Fill, Chip Seal, Fog Seal	Upcoming
YZ Avenue	US 131 to 15th Street	Schoolcraft	Crack Fill, HMA Wedging, Chip Seal, Fog Seal	Upcoming
18th Street	W Avenue to VW Avenue	Schoolcraft	Crack Fill, Chip Seal, Fog Seal	Upcoming
18th Street	VW Avenue to U Avenue	Schoolcraft	Crack Fill, Chip Seal, Fog Seal	Upcoming
Roger Hughey Maple Meadows Plat	Kathryn Street – Vickers Street to V Avenue Sugar Maple Street – 500' south of Kathryn Street to V Avenue Maple Meadows Avenue – 250' west of Vickers to Kathryn Street Vickers Street – Maple Meadows to V Avenue	Village of Vicksburg	Crack Fill, Chip Seal, Fog Seal	Complete
Kalamazoo Avenue	Raymond Street to Vine Street	Village of Vicksburg	Crack Fill, HMA Wedging, Chip Seal, Fog Seal	
Wilson Street	Highway Street to Prairie Street	Village of Vicksburg	Crack Fill, Chip Seal, Fog Seal	
East Prairie Street	Boulevard Street to Mills Street	Village of Vicksburg	Crack Fill, Chip Seal, Fog Seal	
South Main Street	East Highway Street to East Washington Street	Village of Vicksburg	Crack Fill, Chip Seal, Fog Seal	
YZ Avenue	32nd Street to 34th Street- No Fog	Brady	HMA Wedging, Double Chip Seal	Upcoming
31st Street	YZ Avenue to X Avenue- No Fog	Brady	Crack Fill, HMA Wedging, Chip Seal	Upcoming
X Avenue	38th Street to 40th Street- NO FOG	Wakeshma	Double Chip Seal	Upcoming
38th Street	W Avenue to V Avenue- NO FOG	Wakeshma	Chip Seal	Upcoming
Art Martin Street White Lawn Street	W Avenue to 300' north of White Lawn Street 315' west of Art Martin Street to 42nd Street- NO FOG	Wakeshma	Chip Seal	Upcoming
U Avenue	42nd Street to 44th Street	Wakeshma	Chip Seal, Fog Seal	Upcoming
39th Street	T Avenue to R Avenue- NO FOG	Climax	Crack Fill, Chip Seal	Upcoming
40th Street	R Avenue to Q Avenue	Climax	Chip Seal, Fog Seal	Upcoming
OP Avenue	42nd Street to 44th Street- NO FOG	Climax	Crack Fill, Chip Seal	Upcoming
38th Street	O Avenue to 5,280' north of O Avenue- NO FOG	Climax	Crack Fill, Chip Seal	Upcoming
S Avenue	43rd Street to 47th Street- NO FOG	Climax	Crack Fill, Chip Seal	Upcoming
T Avenue	36th Street to 39th Street- NO FOG	Climax	Crack Fill, Chip Seal	Upcoming
Main Street	2,640' south o Maple Street to 2,640' north of Maple Street	Village of Climax	Chip Seal, Fog Seal	Upcoming
33rd Street	T Avenue to S Avenue	Pavilion	Crack Fill, Chip Seal, Fog Seal	Upcoming
Sprinkle Road	24th Street to Zylman Avenue	Pavilion	Crack Fill, Chip Seal	Upcoming
R Avenue	32nd Street to 33rd Street	Pavilion	Crack Fill, HMA Wedging, Chip Seal, Fog Seal	Upcoming
O Avenue	31st Street to 33rd Street	Pavilion	Crack Fill, HMA Wedging, Chip Seal, Fog Seal	Upcoming
T Avenue	32nd Street to 34th Street	Pavilion	Crack Fill, HMA Wedging, Chip Seal, Fog Seal	Upcoming
N Avenue	26th Street to 700' east of 29th Street	Comstock	Crack Fill, Chip Seal	
35th Street	ML Avenue to M-96	Comstock	Crack Fill, Chip Seal	
G Avenue	32nd Street to M-96	Richland	Crack Fill, Chip Seal	
W Van Buren Street	N. Webster Street to 250' east of N. Webster Street	Village of Augusta	Crack Fill, Chip Seal, Fog Seal	
N Webster Street	E. Michigan Avenue to 2,840' north of E. Michigan Avenue	Village of Augusta	Crack Fill, Chip Seal, Fog Seal	
DE Avenue	32nd Street to 2,680' east of 32nd Street	Richland	Crack Fill, Chip Seal, Fog Seal	
32nd Street	DE Avenue to M-343	Richland	Crack Fill, Chip Seal, Fog Seal	
DE Avenue	M-343 to 32nd Street	Richland	Crack Fill, Chip Seal, Fog Seal	
Borgess Drive	Nazareth Road to 75' west of Casper Street	Kalamazoo	Crack Fill, Chip Seal, Fog Seal	

ROAD/PLAT DEVELOPMENT	SEGMENT	TOWNSHIP	TREATMENT	STATUS
Cooper Avenue	Dearborn Avenue to East Main Street	Kalamazoo	Crack Fill, Chip Seal, Fog Seal	
Dartmouth Street Clarendon Street Berkley Street Commonwealth Avenue West North Street	West Main Street to Hillsdale Avenue West Main Street to West North Street West Main Street to Hillsdale Avenue Dartmouth Street to Arlington Street Dartmouth Street to Berkley Street	Kalamazoo	Crack Fill, Chip Seal, Fog Seal	
D Avenue	2,365' west of M-343 to M3-43	Richland	Crack Fill, Chip Seal, Fog Seal	
26th Street	TU Avenue to T Avenue- No Fog- CONTINGENCY - SEE RUSTY	Brady	Crack Fill, Chip Seal	
17th Street	D Avenue to C Avenue- CONTINGENCY PROJECT- SEE RUSTY	Cooper	Crack Fill, Chip Seal, Fog Seal	
5th Street	W Avenue to V Avenue- CONTINGENCY PROJECT	Prairie Ronde	Chip Seal	
2nd Street	U Avenue to TU Avenue- CONTINGENCY PROJECT	Prairie Ronde	Crack Fill, Chip Seal	
X Avenue	40th Street to 42nd Street- CONTINGENCY PROJECT - SEE RUSTY	Wakeshma	Pulverize, Double Chip Seal	
16th Street	Douglas Avenue to B Avenue	Cooper	Chip Seal Trial, Fog Seal	
Summerdale Avenue Simmons Street Spiral Street Sharon Street Spartan Drive	1,805' west of Solvel Street to Solvel Street, G Avenue to Summerdale Avenue, Spartan Drive to Summerdale Avenue, Spartan Drive to Summerdale Avenue, 1,510' west of Simmons Street to Simmons Street	Cooper	Chip Seal Trial, Fog Seal	
Cutters Ridge Ave Flagstone Street Sandstone Avenue Heathers Ridge Street Brownstone Avenue Timberstone Avenue Northridge Street	Flagstone Street to 14th Street, 292' south of Cutters Ridge Avenue to 522' north of Cutters Ridge Avenue, Heathers Ridge Street to Flagstone Street, 353' south of Brownstone Avenue to 461' north of Brownstone Avenue, Brownstone Avenue - 238' west of Heather Ridge Street to Heather Ridge Street, 284' west of Northridge Street to 284' east of Northridge Street, Timberstone Avenue to 245' north of Timerstone Avenue	Cooper	Chip Seal Trial, Fog Seal	
Penny Lane	715' west of 9th Street to 9th Street	Oshtemo	Chip Seal Trial, Fog Seal	
34th Street	W Avenue to V Avenue- No Fog	Brady	Double Chip Seal Trial	
32nd Street	S Avenue to R Avenue	Pavilion	Double Chip Seal Trial	
29th Street	S Avenue to N Avenue	Pavilion	Chip Seal Trial, Fog Seal	
Sprinkle Road	S Avenue to 24th Street	Pavilion	Chip Seal Trial, Fog Seal	
Q Avenue	3,569' east of 46th Street to 5,280' east of 46th Street	Climax	Chip Seal Trial	
44th Street/PQ Avenue	Q Avenue to 2,640' North of OP Avenue	Climax	Chip Seal Trial, Fog Seal	
Q Avenue	43rd Street to 44th Street	Climax	Chip Seal Trial, Fog Seal	